




Features:

- Touch Screen for Easy Operation
- Alpha-numeric Keyboard
- 3/6/12 Lead ECG Display
- 3/6 channels on 110 mm paper
- Optional Interpretation Program
- Built-in Memory for ECG Storage
- Communication Port for External Storage
- Optional Battery Operation for Portability

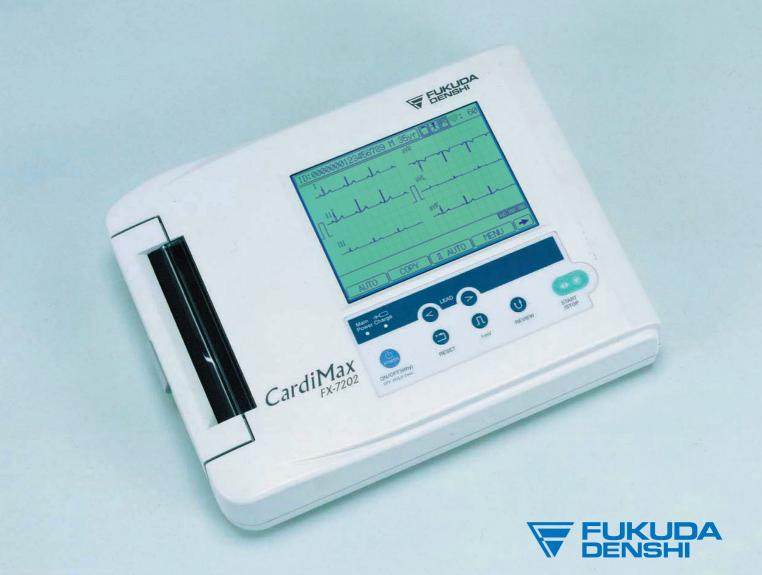

FX-7202 Specifications

ECG	
Leads	Standard 12 leads
Sensitivity selection	1/4, 1/2, 1, 2 cm/mV; manual or automatic
Time Constant	3.2 sec or greater
Frequency response	0.05 Hz to 150 Hz (within -3dB)
Common mode rejection ratio	
Max. electrode potential	±550mV or greater
A/D conversion	18 bits
Sampling frequency	8000 samples/sec/channel
Filters	AC: 50 or 60 Hz, -20dB or less
	Muscle: 25 or 35 Hz, -3dB (-6dB/oct)
	Drift: 0.25 or 0.5Hz, -3dB (-6dB/oct)
ECG Storage	
Built-in memory	Up to 128 events
Display	
Device	Backlight LCD with Touch Screen
Display area	115 mm (H) x 86 mm (V)
Resolution	320 x 240 dots
Representation	3/6/12 channels ECG display
Onematica	
Operation Devices for operation	Touch Screen and membrane keys
Devices for operation	· · · · · · · · · · · · · · · · · · ·
	(The touch screen is used for alphanumeric keyboard input)
Recorder	
Method	Thermal dot array
Paper speed	10, 12.5, 25 or 50 mm/sec
Recording paper	Z-fold, 110mm x 20m, fold length:140mm (OP-222TE)
recessumg paper	2 loid, 110mm x 20m, loid lengur. 170mm (O1 22212)
I/O interface	
Communication port	RJ-45 connector
•	
Safety	
Regulatory standards	IEC60601-1, IEC60601-2-25
Electrical shock protection	Class I, Type CF and Internally powered equipment, Type CF
Conformity	CE marking per 93/42/EEC Directive
General	
Power requirements	100 to 240V AC Universal, 50/60Hz, or 9.6V DC (optional rechargeable battery)
Dimensions	260 (W) x 206 (D) x 64 (H) mm
Weight	Approx. 2.5 Kg (w/o battery)
Option	
Program cartridge	PC-7403: Interpretation
Rechargeable battery	T8HRAAU-4713 (Ni-MH)

 $FUKUDA\ DENSHI\ reserves\ the\ right\ to\ change\ specifications\ without\ notice.$



FUKUDA DENSHI CO., LTD. 39-4, Hongo 3-chome, Bunkyo-ku, Tokyo 113-8483, Japan Tel: +81-3-5684-1455 Fax: +81-3-3814-1222